

P.T. Eurindo TG & Germino Exim Group

Makassar-Indonesia & Munich-Germany



JGN-901



JGN-902



JGN-903



JGN-904



JGN-905



JGN-906



JGN-907



JGN-908



JGN-909

- 高压压铸成型外壳，外部静电喷涂处理。
- 高纯铝板压铸成型反射器，表面阳极氧化处理。
- 不锈钢灯杆。
- 透光罩采用高透明强度玻璃。
- 耐高温硅胶密封胶等。

- Body is die casting aluminum shell, spraying plastics surface by electrostatic method.
- Imported high-pure aluminum reflector.
- Stainless steel pole.
- High transmissive, vandal resistant, reinforced and curves glass.
- Harmonic built of heat-resisting silica gel.

外形尺寸 lamp body basic form chart

RDDL-022-A

RDDL-022-B

配光曲线
Polar diagram

防护等级	安装尺寸	灯头
IP65	Installation Tube Size 60mm	Base E40

Model: WK901

Lamp-house : **1pcs 20W low-tension sodium lamp or LED lamp**

Lamp-house depict: lighting life-span 100000h, 5Lux

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator , exterior anode oxidation 。 Transparency high strength glass, resist high temperature silicon latex chaplet air proof。

Lamp high: 6m

lighting time: each day lighting **8~10h**。

Solar photovoltaic systems: **60W**

Solar photovoltaic systems spec: 1000x515x35mm

secondary cell : full airproof maintenance-free lead acid accumulator **12V/33AH**

control : 12V/5A , hove full , expand , in reverse , over loading short , lightning strike protect, PWM,



Grade: IP65

characteristic: brume penetrate


Unit price: \$ 900,-- (no contain tax, freight)

- 高压压铸铝成型外壳，外部静电喷塑处理。
- 采用铝压铸成型反射器，表面阳极氧化处理。
- 不锈钢装饰。
- 透光罩采用高透高强度玻璃。
- 耐高温硅橡胶密封件。
- Body is die casting aluminum shell, spraying plastics surface by electrostatic method.
- Imported high-pure aluminum reflector.
- Stainless steel fastener.
- High transmissive, vandal resistant, reinforced and curves glass.
- Hermetic belt of heat-resisting silica gel.

外形尺寸 lamp body basic form chart

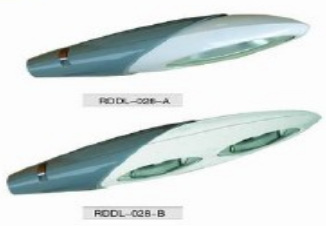

配光曲线 Polar diagram



防护等级	安装尺寸	灯头
IP65	Installation Tube Size 60mm	E40



Model: WK903

Lamp-house : **1pcs 18W low-tension sodium lamp or LED lamp**

Lamp-house depict: lighting life-span 18000h, radius 110Lm/W, luminous flux 1900Lm

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator, exterior anode oxidation。 Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 6m

lighting time: each day lighting **8~10h.**

Solar photovoltaic systems: **55W**

Solar photovoltaic systems spec: 805x535x35mm

secondary cell: full airproof maintenance-free lead acid accumulator **12V/20AH**


control : 12V/5A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM, Grade: IP65

characteristic: brume penetrate


Unit price: \$ 800,-- (no contain tax, freight)

- 高压压铸铝成型外壳，外部静电喷塑处理。
- 采用铝压铸成型反射器，表面阳极氧化处理。
- 不锈钢装饰。
- 透光罩采用高透高强度玻璃。
- 耐高温硅橡胶密封件。
- Body is die casting aluminum shell, spraying plastics surface by electrostatic method.
- Imported high-pure aluminum reflector.
- Stainless steel fastener.
- High transmissive, vandal resistant, reinforced and curves glass.
- Hermetic belt of heat-resisting silica gel.

外形尺寸 lamp body basic form chart



配光曲线 Polar diagram



防护等级	安装尺寸	灯头
IP65	Installation Tube Size 60mm	E40



Model: WK904

Lamp-house: **2pcs 35W LED lamp**

Lamp-house depict: lighting life-span 10000h, radius 180Lm/W, luminous flux 6300Lm

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator, exterior anode oxidation。 Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 10m

lighting time: each day lighting **8~10h.**

Solar photovoltaic systems: **200W**

Solar photovoltaic systems spec: 1950x995x50mm/pcs

secondary cell: full airproof maintenance-free lead acid accumulator **24V/55AH**

control : 24V/10A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM, Grade: IP65

characteristic: longevity, high lightness, easy maintenance
Unit price: \$ 2.700,-- (no contain tax, freight)



Model: WK905

Lamp-house : **1pcs 55W low-tension sodium lamp or LED lamp**

Lamp-house depict: lighting life-span 18000h, radius 145Lm/W, luminous flux 8100Lm

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator, exterior anode oxidation。 Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 8m

lighting time: each day lighting **8~10h.**

Solar photovoltaic systems: **250W(2x125w)**

Solar photovoltaic systems spec: 1480 x480x35mmx2


secondary cell: full airproof maintenance-free lead acid accumulator 24V/120AH

control: 24V/10A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM,



Grade: IP65

characteristic: longevity, high lightness, easy maintenance

Unit price: \$ 2.200,-- (no contain tax, freight)




配光曲线
Polar diagram

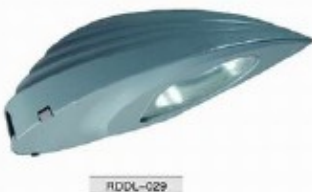

- 高压压铸铝成型外壳，外部静电喷塑处理。
- 高精度压铸成型反射器，表面阳极氧化处理。
- 不锈钢紧固件。
- 透光罩采用曲面高强度玻璃。
- 耐高温硅橡胶密封带。
- Body is die casting aluminum shell, spraying plastics surface by electrostatic method.
- Imported High-pure aluminum reflector.
- Stainless steel fastener.
- High transmissive, vandal resistant/reinforced and curves glass.
- Hermetic belt of heat-resisting silica gel

外形尺寸 lamp body basic form chart




RDCL-033-A



RDCL-033-B

配光曲线
Polar diagram



防护等级	安装尺寸	灯头
IP65	Installation Tube Size 60mm	Base E40

Model: WK906

Lamp-house: **1pcs 25W LED or low-tension sodium lamp**

Lamp-house depict: lighting life-span 100000h, radius 170Lm /w, luminous flux 4200Lm

Lamp pole: zincification steel tube

lampshade: high-voltage casting aluminium, exterior static spurt model。high strength aluminum plank flashreverberator, exterior anode oxidation。Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 6m

lighting time: each day lighting **8~10h**。

Solar photovoltaic systems: **130W**

Solar photovoltaic systems spec: 1480 x680x35mm


secondary cell: full airproof maintenance-free lead acid accumulator 12V/200AH

control: 12V/10A, hove full, expand, in reverse, over loading short, lightning strike protect, PWM,

Grade: IP65

characteristic: longevity, high lightness, easy maintenance


Unit price: \$ 1.900,-- (no contain tax, freight)

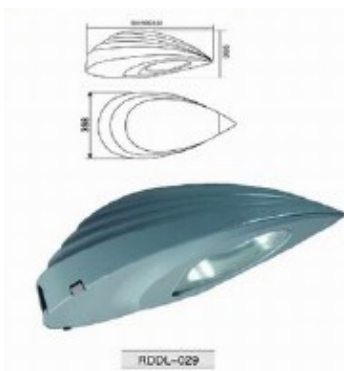

RDCL-029



配光曲线
Polar diagram



Model: WK907

Lamp-house: **1pcs 35W LED or low-tension sodium lamp**

Lamp-house depict: lighting life-span 18000h, radius 124Lm /w, luminous flux 4600Lm

Lamp pole: zincification steel tube

lampshade: high-voltage casting aluminium, exterior static spurt model。high strength aluminum plank flashreverberator, exterior anode oxidation。Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 6m

lighting time: each day lighting **10h**。

Solar photovoltaic systems: **100W**

Solar photovoltaic systems spec: 1480x680x35mm


secondary cell: full airproof maintenance-free lead acid accumulator 12V/50AH

control: 12V/10A, hove full, expand, in reverse, over loading short, lightning strike protect, PWM,

Grade: IP65

characteristic: longevity, high lightness, easy maintenance

Unit price: 1.200,-- (no contain tax, freight)

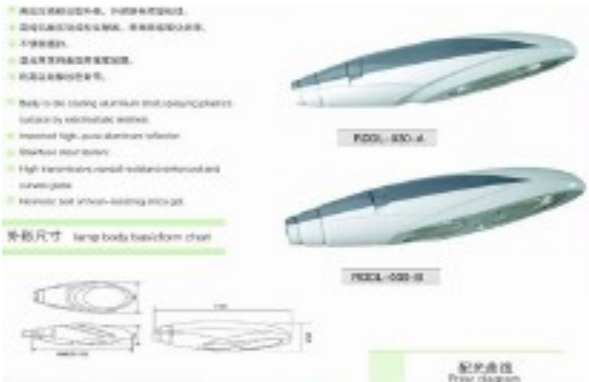

Model: WK908

Lamp-house : **1pcs 36W low-tension sodium lamp and 1pcs 3W LED**

Lamp-house depict: lighting life-span 18000h, radius 124Lm /w, luminous flux 4600Lm

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator , exterior anode oxidation。 Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 8m

lighting time: each day lighting 8-10h。

Solar photovoltaic systems: **200W(2x 100w)**

Solar photovoltaic systems spec: 1480 x680x35mmx2

secondary cell: full airproof maintenance-free lead acid accumulator 24V/120AH

control: 24V/10A , hove full , expand , in reverse , over loading short , lightning strike protect , PWM,

Grade: IP65


characteristic: longevity, high lightness, easy maintenance

Unit price: \$ 2.200,-- (no contain tax, freight)




- 高压压铸铝成型外壳，外部静电喷涂处理。
- 高纯铝压铸成型反射器，表面阳极氧化处理。
- 不锈钢铆钉。
- 透光率采用高透高强度玻璃。
- 耐高温硅橡胶密封带。
- Body is die casting aluminum shell,spraying plastics surface by electrostatic method.
- imported High-pure aluminum reflector.
- Stainless steel fastener.
- High transmissive,vandal resistant/reinforced and curves glass.
- Hermetic belt of heat-resisting silica gel

外形尺寸 lamp body basicform chart



配光曲线
Polar diagram



防护等级	安装尺寸	灯头
IP65	Installation Tube Size 60mm	Base E40

Model: WK909

Lamp-house: **1pcs 55W low-tension sodium lamp**

Lamp-house depict: lighting life-span 18000h,radius 124Lm /w,luminous flux 4600Lm

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator, exterior anode oxidation。Transparency high strength glass, resist high temperature silicon latex chaplet airproof。

Lamp high: 8m

lighting time: each day lighting 8-10h。

Solar photovoltaic systems: **220W(2x 110w)**

Solar photovoltaic systems spec: 1480 x680x35mmx2

secondary cell: full airproof maintenance-free lead acid accumulator 24V/120AH

control: 24V/10A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM,

Grade: IP65

characteristic: longevity, high lightness, easy maintenance

Unit price: \$ 2.200,-- (no contain tax, freight)

Model: WK902

Lamp-house: **3pcs 35W low-tension sodium lamp**

Lamp-house depict: lighting life-span 18000h,radius 124Lm /w,luminous flux 4600Lm

Lamp pole: zincification steel tube

lampshade : high-voltage casting aluminium , exterior static spurt model 。 high strength aluminum plank flashreverberator, exterior anode oxidation。Transparency high strength glass, resist high temperature silicon latex chaplet air proof。

Lamp high: 8m

lighting time: each day lighting 10h。

Solar photovoltaic systems: **340W(2x 170w)**

Solar photovoltaic systems spec:1580 x805x50mmx2

secondary cell: full air proof maintenance-free lead acid accumulator 24V/80AH

control: 24V/15A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM,

Grade: IP65

characteristic: longevity, high lightness, easy maintenance



Unit price: \$ 2,700,-- (no contain tax, freight)



Model: WK940

Lamp-house: 10pcs LED lamp

Lamp-house depict: lighting life-span 18000h, radius 180Lm /w, luminous flux 1800Lm

Lamp pole: zincification steel tube

lampshade : lamp with lamp pole inosculate , high strength aluminum plank flashreverberator , exterior anode oxidation 。 Transparency white ACRYLIC , resist high temperature silicon latex chaplet airproof。

amp high: 3.5m

lighting time: each day lighting 8-10h。

Solar photovoltaic systems: **40W**

Solar photovoltaic systems spec: 655 x535x35mm

secondary cell: full air proof maintenance-free lead acid accumulator 12V/40AH

control : 12V/5A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM,

Grade: IP65

characteristic: longevity, high lightness, easy maintenance

Unit price: \$ 900,-- (no contain tax, freight)



Model: WK940

Lamp-house: **54w LED lamp**

Lamp-house depict: lighting life-span 18000h, radius 180Lm /w, luminous flux 1800Lm

Lamp pole: zincification steel tube

lampshade : lamp with lamp pole inoculate , high strength aluminum plank flashreverberator , exterior anode oxidation 。 Transparency white ACRYLIC , resist high temperature silicon latex chaplet air proof。

amp high: 8m

lighting time: each day lighting 8-10h。

Solar photovoltaic systems: **130W**

Solar photovoltaic systems spec: 1480 x68035mm

secondary cell: full air proof maintenance-free lead acid accumulator 12V/65AH

control : 12V/15A , hove full , expand , in reverse , over loading short, lightning strike protect, PWM,

Grade: IP65

characteristic: longevity, high lightness, easy maintenance

Unit price: \$ 1.500,00 (no contain tax, freight)

More information, please send an email to:

info@eurindo.de & info@visitindonesia.de

Websites:

www.eurindo.de & www.visitindonesia.de